



## 8 Port PoE 2 UpLink Giga




### Specifications:

- 8\*10/100Mbps POE port;2\*100/1000Mbps UP Link port
- 250m Distance; Vlan Support
- Support IEEE802.3AF/AT
- Whole Power:120W(52V 2.3A)
- All port supported by MDI/MDIX auto flip and self negotiation
- Supply 8 10/100Mbps adaptive high speed forwarding data packet non-lost port.
- Support IEEE802.3x flow control for Full-duplex mode and backpressure for Half-duplex mode.
- Each port max. power supply reached 30W.

### Application:

- Wireless Access Point
- IP Camera
- IP Phone
- Computer Networks

### Dimensions:

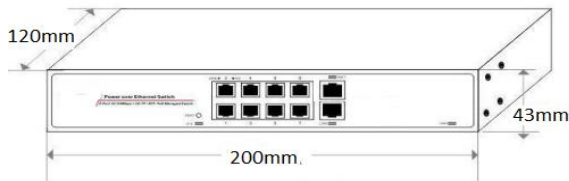

Model No.	XP-SW2508-UG
Product	8+2 Port 250m POE Switch (Built-in)
POE Port	1 to 8 support IEEE802.3AF/AT Standard
Output Power	15.4W/30W IEEE802.3af/at
Power Pin	Both 1/2+, 3/6- and 4/5+7/8-
Whole Power	≤120W (52V 2.3A)
POE Protocol	IEEE 802.3af/IEEE 802.3at
POE Type	End-span
Power Distance	≤250m
Network Standard	IEEE 802.3, IEEE802.3u, 802.3x, 802.3af/at
Network Medium	10/100BASE-TX:5 class and above non shielded twisted pair
Data Distance	≤250m
Switch Capability	10Gbps
Forwarding Mode	Store and forward
Forwarding Rate	100Mbps:14880pps 1000Mbps:14800pps
MAC Address	MAC address table 2K
Port Function	Power priority mechanism, fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator	LINK/ACT.100Mbps;POE Status Indicator; Power indicator;Extender
Working Environment	Working temperature : -10°-- 55°C
Weight	1.2kg
Size	200mm*120mm*43mm(L*W*H)